
## NOTES:

- 1. SERVICE PIPE TO BE WEAVED IN TRENCH TO ALLOW AT LEAST ONE (1) FOOT EXTRA LENGTH IN ITS LENGTH.
- 2. UPON COMPLETION OF WATER SERVICE CONSTRUCTION, ALL BOXES ARE TO BE SET AT FINISHED GRADE.
- 3. ALL SERVICES UNDER PAVEMENT TO BE AUGERED.
- 4. JET ALL TRENCHES.
- 5. ALL WATER SERVICES TO HOUSE WILL HAVE MINIMUM 5.5' OF GROUND COVER.
- 6. IEPA MINIMUM SEPARATION REQUIREMENTS MUST BE MAINTAINED BETWEEN SERVICES AND EXISTING SEWERS.
- 7. INSTALL CASING PIPE ON ALL SERVICES CROSSING COUNTY HIGHWAYS.
- 7. ABANDON EXISTING SERVICE AT CORPORATION USING COPPER DISC MUELLER H-15535 AND FLARE NUT.

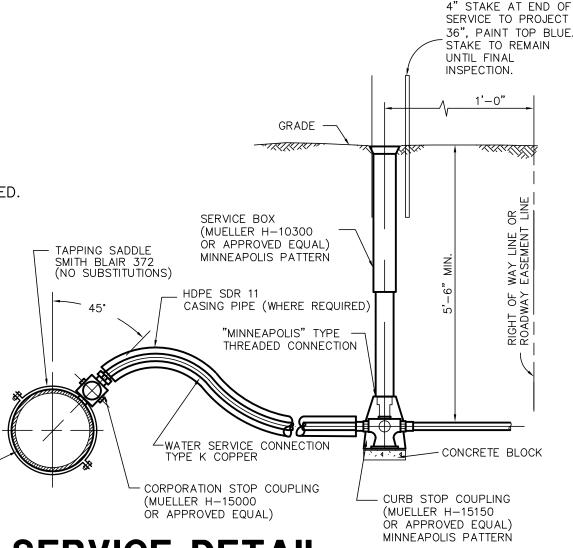

WATER SERVICE DETAIL